


NMEA 0183 (EIA-422-A) Input:
 \$--MWV,x.x,a,x.x,a,A*hh<CR><LF>
 OR
 \$--VWR,x.x,a,x.x,N,x.x,M,x.x,K*hh<CR><LF>
 If both sentences are present at the input, the MWV sentence is preferred and takes priority

Power requirements:
 12 Volts nominal (10 - 18 Volts)
 <50 mA
 protect with 250 mA fuse

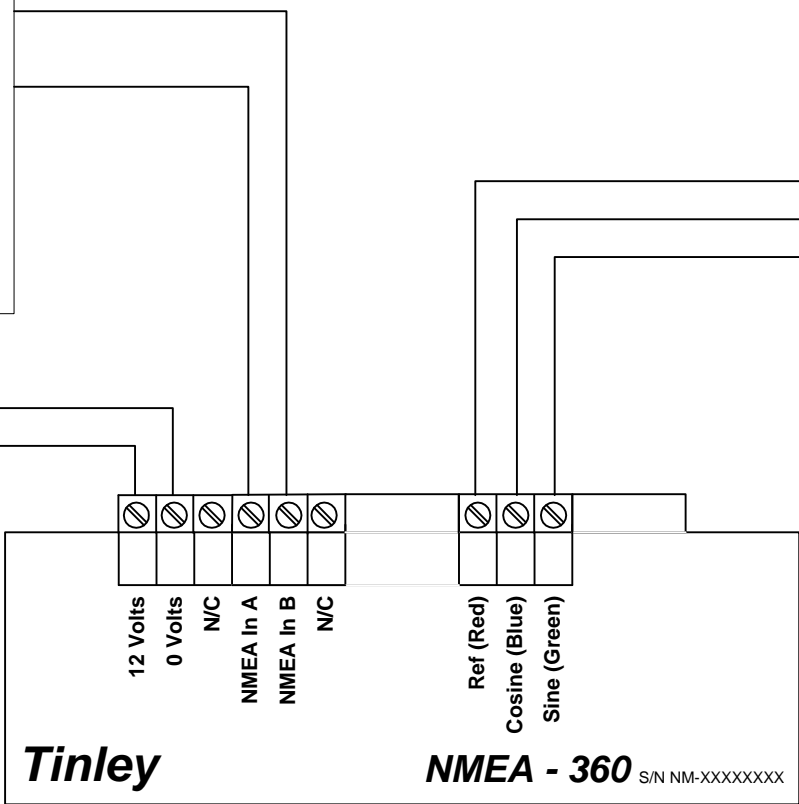

B&G 360 Synchro connections
 3 Common (Red)
 1 Cosine (Blue)
 2 Sine (Green)